



- 1、自来水或其他水源接入供给流量必须保障与清洗机吸水量吻合。
- 2、市电或其他电源电压在220V/380V,输.入电路承载电源线、线径不低于4平方毫米/根。
- 3、壁挂使用,需要坚固的墙面。
- 4、本机设计使用介质为清洁水,严禁吸入含有机溶剂的液体,如酸性溶剂,(包括汽油、油漆燃料和燃油等危险物品)。
- 5、为清除机器内的杂质碎屑第一次更换机油请在使用清洗机100小时后。以后,根据使用情况及时更换机油,一般每工作300个小时一次 围换
- 6、使用详情请阅使用说明书。
- 1. The supply flow of tap water or other water sources must be guaranteed to coincide with the water in-take of the washing machine.
- 2. The voltage of municipal electricity or other power supply is 220V/ 380V, and the input circuit bears power cord and wire diameter not less than 4 square millimeters/ root.
- 3. Wall hanging needs strong wall.
- 4. The machine is designed to use clean water as the medium. It is strictly forbidden to inhale liquids c- ontaining organic solvents, such as acidic solvents (including gasoline, paint fuels and fuel and otherdangerous goods).
- 5. In order to remove impurities and debris in the machine, please replace the oil for the first time afterusing the cleaning machine for 100 hours. Later, according to the use of timely replacement of oil, usu-ally every 300 hours of work once replacement.
- 6. For details, please refer to the instructions.

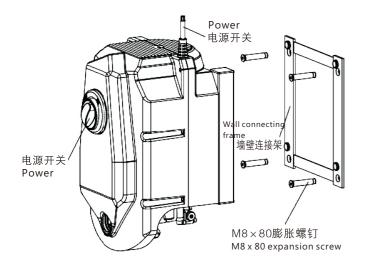



## 型号:HB6/15CH

## 技术参数 TECHNICAL PARAMETER

适用电源Suitable power supply: AC-220V/50Hz

功率Power: 3.1KW

最高水温Maximum water temperature: 60°C

流量Flow: 560L/h

工作电压 Working Pressure: 15MPa≈150Bar≈2180Psi

转速Speed: 2800rpm

净重Net weight: 30.6Kg

外形尺寸Outline dimension: 630\*355\*395mm



## 技术参数 TECHNICAL PARAMETER

适用电源Suitable power supply: AC-380V/50Hz

功率Power: 4.7KW

最高水温M aximum water temperature: 60°C

流量Flow: 720L/h

工作电压 Working Pressure: 18MPa≈180Bar≈2610Psi

转速Speed: 2800rpm

净重Net weight: 30.6Kg

外形尺寸Outline dimension: 630\*355\*395mm