


产品特点

PRODUCT CHARACTERISTICS

1. 本清洗机选用专用电动机，通过三联曲轴驱动三缸柱塞，结构连续紧凑、性能可靠、体积小、外形采用金属钣金结构、高档喷塑处理，使用更安全。
2. 本机配有智能功率过载、电压过低、电压过高、电机缺相、电机偏相、缺水及机械过载等保护功能，并设有关枪停机和软启动功能。
3. 用户可根据需要选用混药器以提高清洗效果。当你在使用混药器时，应将喷头转换到喷淋的位置（该喷嘴为公司的多功能喷头），如果你在使用混药器时选错了喷头功能，则无法自动吸混药液。

1. This cleaning machine uses special motor to drive three-cylinder plunger through triple crankshaft. Its structure is continuous and compact, its performance is reliable, its volume is small, its shape adopts metal sheet metal structure and high-grade plastic spraying treatment, so it is safer to use.
2. The machine is equipped with intelligent power overload, low voltage, high voltage, motor phase absence, motor phase bias, water shortage and mechanical overload protection functions, and has shutdown and soft start functions.
3. Users can choose mixer according to their needs to improve the cleaning effect. When you use the mixer, you should change the spray nozzle to the spray position (the multi-function spray nozzle of our company). If you choose the wrong function of the spray nozzle when you use the mixer, you can not automatically suck the mixing liquid.

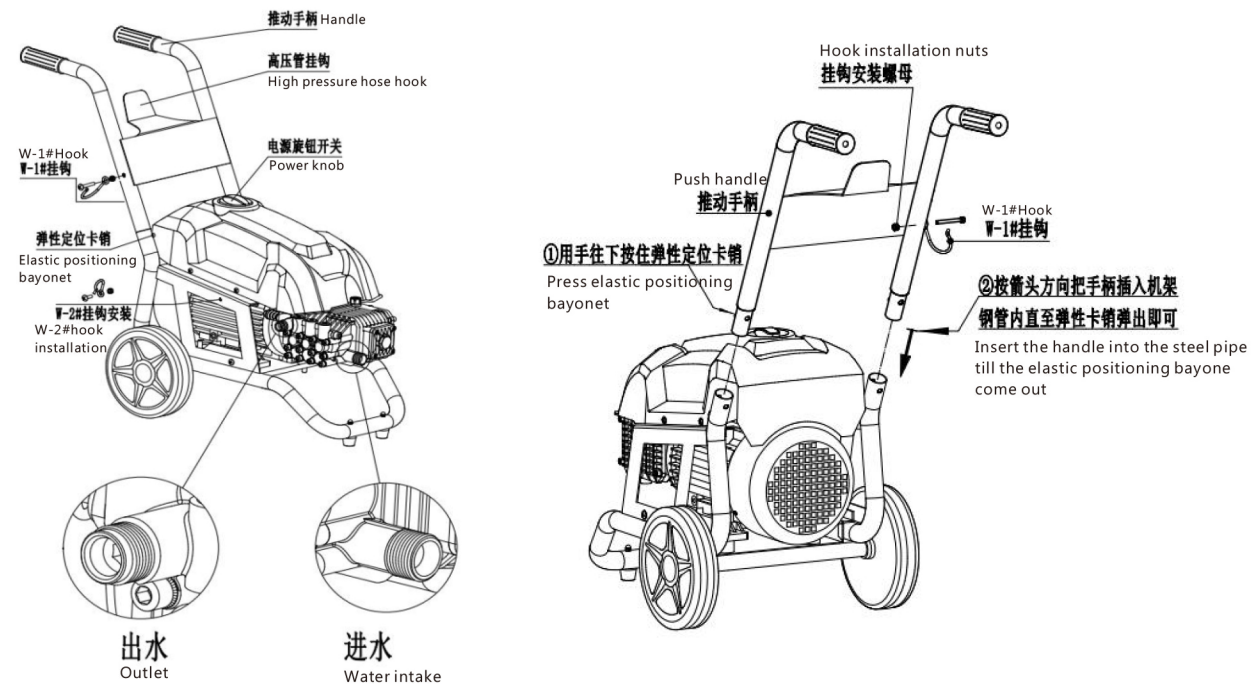

可选型号



技术参数 TECHNICAL PARAMETER

适用电源 Suitable power supply: AC-220V/50Hz

功率 Power: 3.4KW

最高水温 Maximum water temperature: 60°C

流量 Flow: 720L/h

工作压力 Working Pressure: 13MPa≈130Bar≈1885Psi

转速 Speed: 1420rpm

净重 Net weight: 53.5Kg

外形尺寸 Outline dimension: 610*440*500mm



技术参数 TECHNICAL PARAMETER

适用电源 Suitable power supply: AC-380V/50Hz

功率 Power: 4.0KW

最高水温 Maximum water temperature: 60°C

流量 Flow: 720L/h

工作压力 Working Pressure: 15MPa≈150Bar≈2175Psi

转速 Speed: 1420rpm

净重 Net weight: 53.5Kg

外形尺寸 Outline dimension: 610*440*500mm